
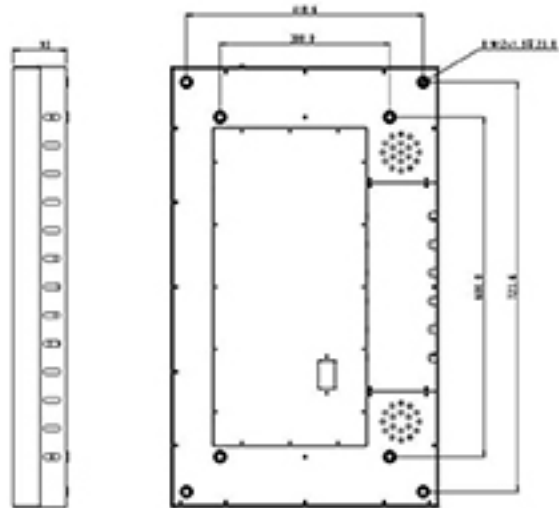


## II. Specifications



Product Technical Parameters							
Category			Maintenance-free Noise Free Outdoor Fan-cooling Wall-mounted Advertising Display				
Series Number		SD-SWOD32MF	SD-SWOD43FC MF	SD-SWOD49FC MF	SD-SWOD55FC MF	SD-SWOD75FC MF	SD-SWOD75FCM F
Highlight Display	Screen Size	32 Inch	43 Inch	49 Inch	55 Inch	75 Inch	85 Inch
	Resolution	1920*1080	1920*1080	1920*1080	3840*2160	3840*2160	3840*2160
	Max Brightness (nit)	3000	3000	3000	3000	3000	3000
	Display Size (mm)	699*393	942*530	1074*604	1210*681	1651*929	1874*1055
	Viewing Angle	178°(H)/ 178°(V)	178°(H)/ 178°(V)	178°(H)/ 178°(V)	178°(H)/ 178°(V)	178°(H)/ 178°(V)	178°(H)/ 178°(V)
	Brightness Control	Automatic Photosensitive	Automatic Photosensitive	Automatic Photosensitive	Automatic Photosensitive	Automatic Photosensitive	Automatic Photosensitive
	Theoretical life (Hours)	>50000	>50000	>50000	>50000	>50000	>50000
	Response Time	6ms (typ.)	6ms (typ.)	6ms (typ.)	6ms (typ.)	6ms (typ.)	6ms (typ.)
Machine Parameters	Landscape Dimension (H*W*T mm)	778*473*144.3	1022*610*144.3	1154*684*142.3	1291*762*144.3	1730*1008*160	1952*1133*93.3
	Power Supply	AC110-240V,± 10% 50/60Hz	AC110-240V,± 10% 50/60Hz	AC110-240V,± 10% 50/60Hz	AC110-240V,± 10% 50/60Hz	AC110-240V,± 10% 50/60Hz	AC110-240V,±1 0% 50/60Hz
	Cooling System	Inner loop	Inner loop	Inner loop	Inner loop	Inner loop	Inner loop
	Protection Level	IP65	IP65	IP65	IP65	IP65	IP65
Optional	Air Conditioner Cooling	It is recommended to choose an air conditioner cooling solution in extreme high temperature and low temperature environments.					
	Touch	10-point Projective Capacitive Touch Glass, 10-point Projective Capacitive Touch Film					
Basic Parameters of The Scheme		CPU		RK3288: Quad-core Cortex-A17 up to 1.8GHz			
		GPU		Mali-T764 GPU			
		RAM		DDR 2GB			

	ROM	EMMC 8G (16G/32G/64G Optional)
	OS	Android7.1
	Network Support	Standard Configuration: Ethernet, Wireless WiFi2.4G Optional: 3G/4G
Input & Output Interface	USB Port	2 PCS
	RJ45	1 PCS
	TF Card Slot	1 PCS
	Speakers	IP67 waterproof speaker 4 Ω 8W
	HDMI Output	1 PCS
Support Media Format	Video Format	RM/RMVB, MKV, TS, FLV, AVI, VOB, MOV, WMV, MP4, ETC.
	Image Format	BMP, JPEG, PNG, GIF, ETC.
	Audio Format	MP3, WMA
Structure	Appearance Material	The machine shell is made of 6063-T5 aluminum alloy, and the outer frame surface is fluorocarbon sprayed aluminum alloy. It has novel appearance, generous, strong texture, not easy to corrosion, oxidation resistance and no color loss. The compact design of the all-aluminum body is more than 30% lighter than the traditional machine.
	Glass	Explosion-proof glass, optical binding
Electric Control	Switching Power Supply	Industrial grade power supply
	Waterproof Speaker	IP67 waterproof speaker 4 Ω 8W
	Lightning Protector	Three-level lightning protection
	Leakage Protector	Anti-leakage
	Timer	Customized timer can be set according to day, week and month.
Cooling System	Inner loop	Fanless silent design, suitable for different environments
Environmental Factor	Operating Temperature:	Fan-cooling: -10°C to +50°C;
	Working Humidity	5%~95%
	Operating Voltage	AC 220V/50Hz



### III. Product Dimension

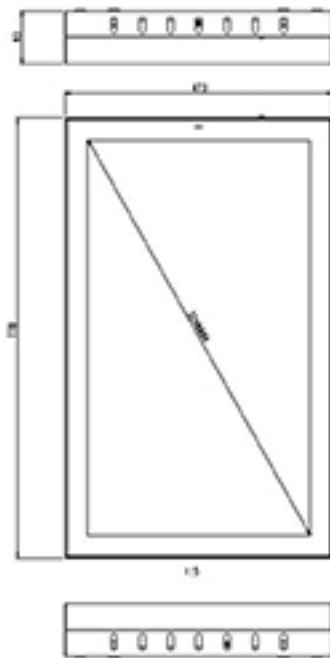



**32 INCH**

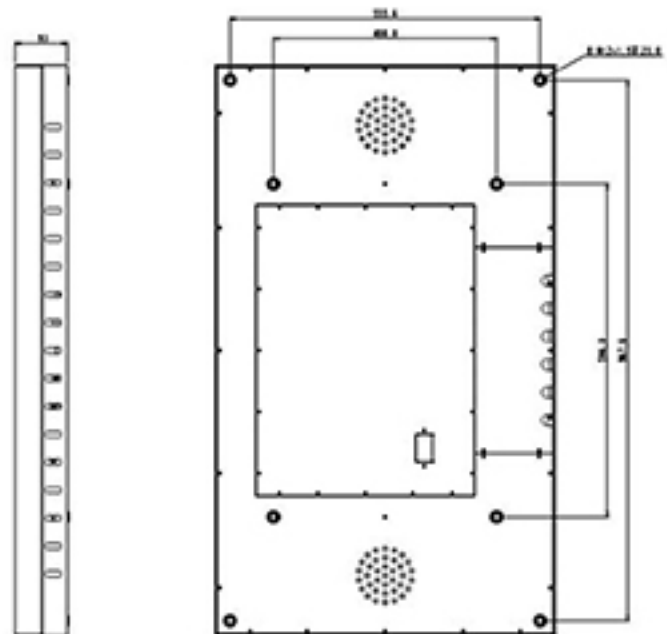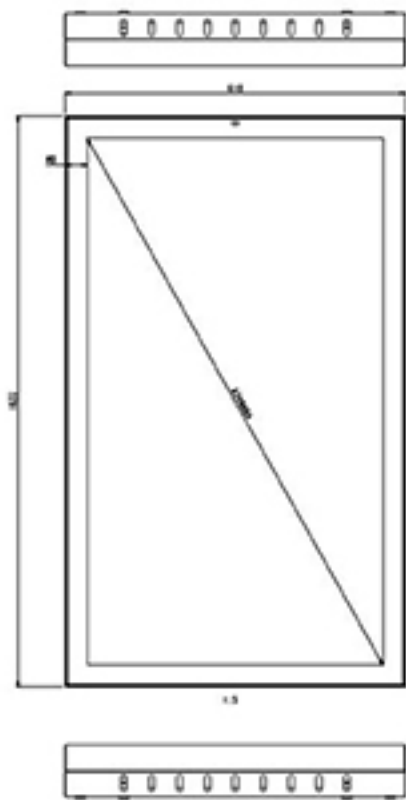




**43 INCH**

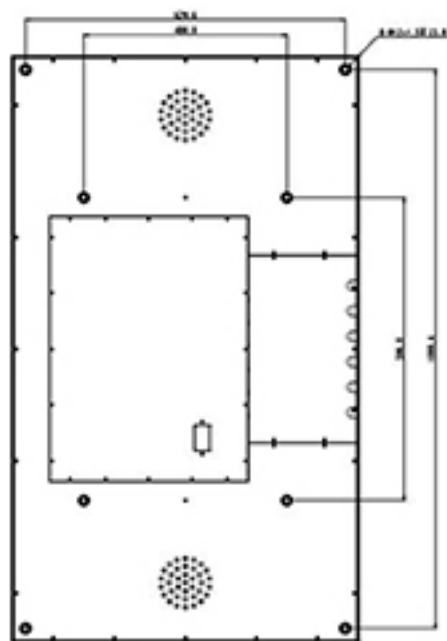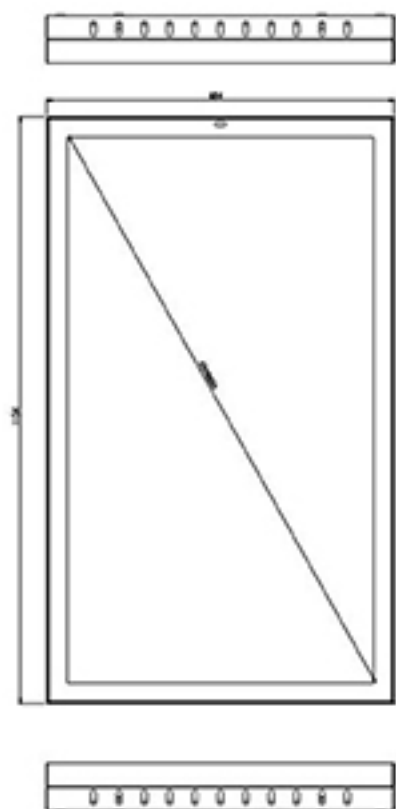



49 INCH

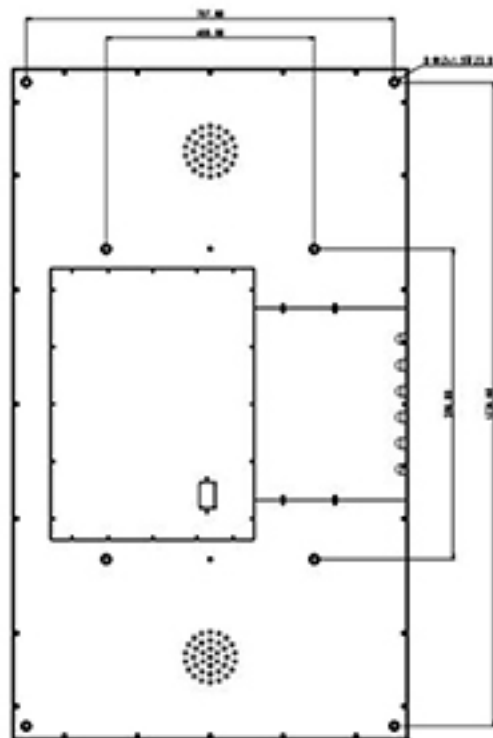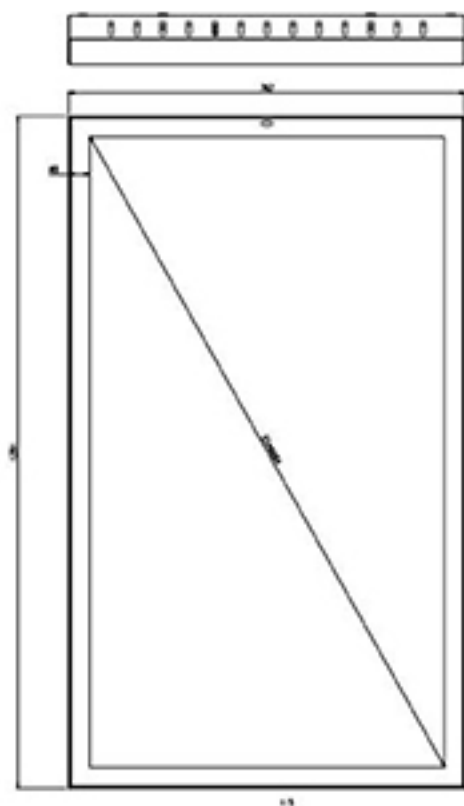

55 INCH

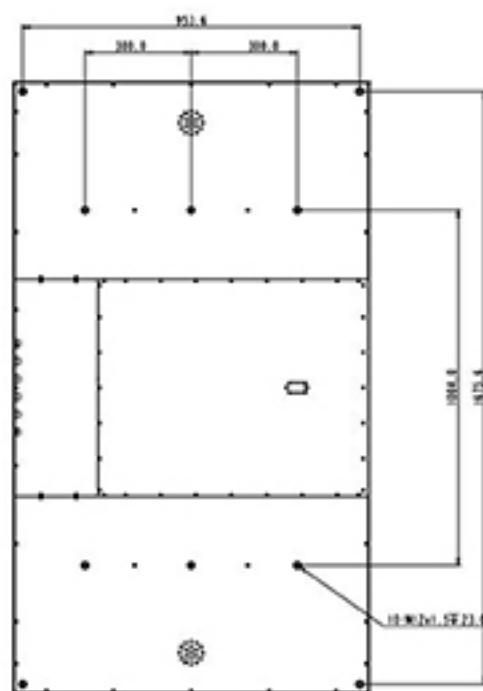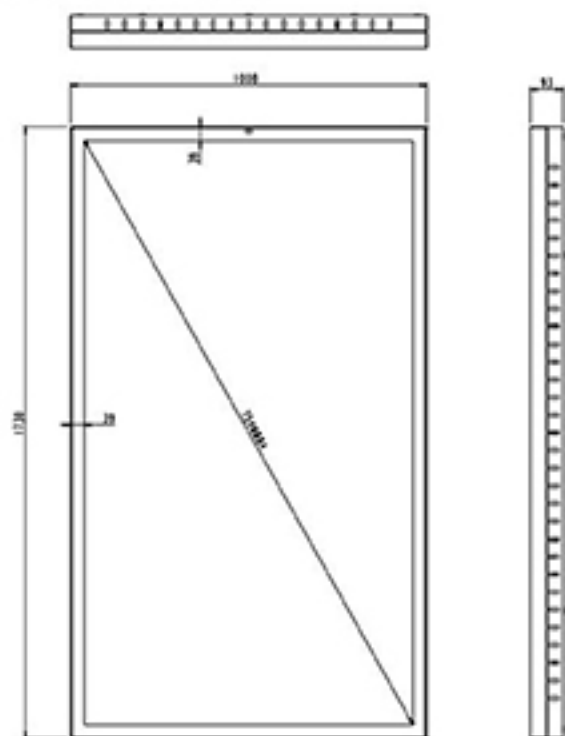

**75 INCH**

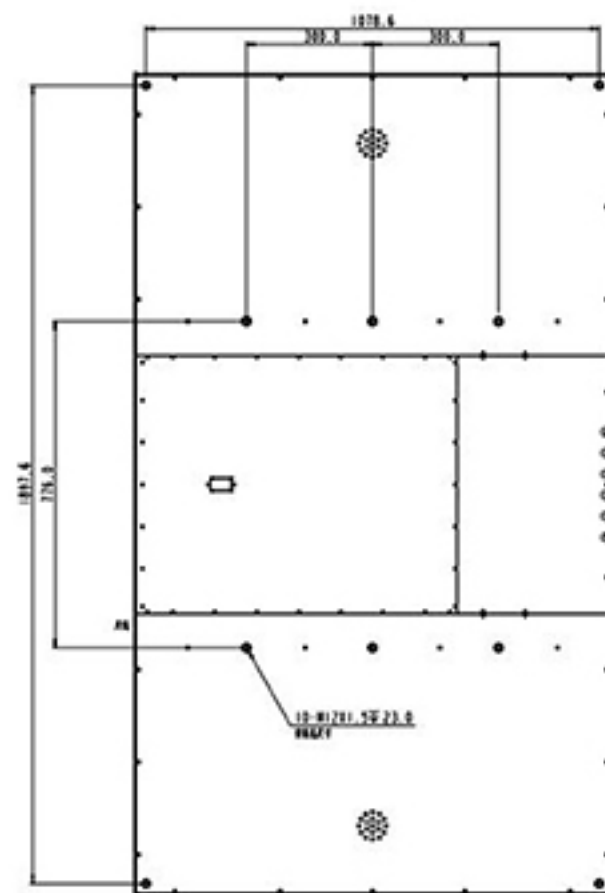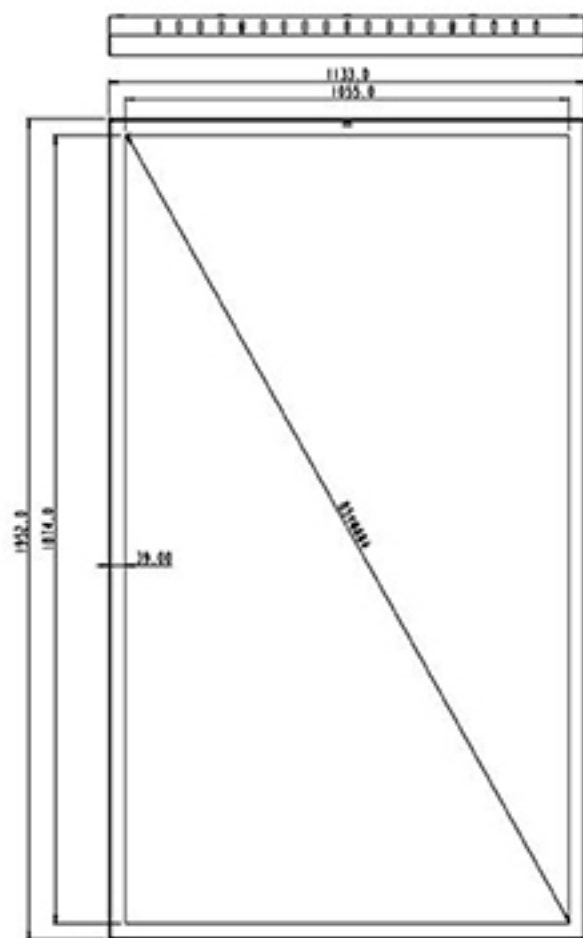

**85 INCH**